


ULTRA-THIN FORCE-CONTROL SERVO JOINT MODULE

超薄力控伺服关节模组

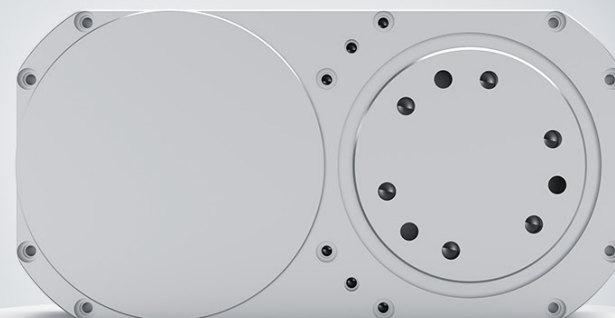

HTPU-60BM-35-NE

超薄力控伺服关节模组

产品参数 Product Parameters

基本参数

Basic parameters

长度 length (mm)	115
宽度 width (mm)	61.9
高度 high degree (mm)	37
重量 weights (g)	558

减速机特性参数

Reducer Characteristics

齿隙 Backlash(Arcmin)	<10
重复定位精度 Repeat Positioning Accuracy(Arcmin)	<12
绝对定位精度 Absolute positioning accuracy(Arcmin)	<15

电机特性参数

///

Motor parameters

扭矩常数 Torque constant(Nm/A)	0.056	极对数 Polar logarithm(mm)	14
-------------------------------	-------	----------------------------	----

模组性能参数(24v)

Module performance parameters

减速比 Reduction ratio	35	额定扭矩 Rated torque(Nm)	10
堵转扭矩 Blocking torque(Nm)	36	额定转速 Rated RPM(RPM)	50
空载转速 Polar logarithm(RPM)	60	额定功率 Rating(W)	52

产品安装尺寸图纸 Product Installation Dimension Drawing

